


## Kerf-In Weatherstrip (Cont.)

### PK52\_

AVAILABLE FINISHES: **BL, W**  
AVAILABLE LENGTHS: 18', 20', 300'


- Minimum space between the door face and the stop is  $\frac{1}{16}$ "; maximum space is  $\frac{3}{8}$ "
- Positive Pressure rated up to 20 minutes



### P50\_

AVAILABLE FINISHES: **BL, W**  
AVAILABLE LENGTHS: 17', 25', 250'


- Minimum space between the door face and the stop is  $\frac{1}{16}$ "; maximum space is  $\frac{5}{16}$ ". Available in 17' or 25' packaged coils
- Thermoplastic elastomer formulation will not transigrate; remains flexible to  $-60^{\circ}$  F



### MAG349\_

AVAILABLE FINISHES: **D, W**  
AVAILABLE LENGTHS: 37", 85", 96", 121"


- Minimum space between the door face and the stop is  $\frac{3}{8}$ "; maximum space is  $\frac{7}{16}$ "
- Magnetic kerf-in weatherstrip features a magnetic strip encased by a UV-stable TPE cover
- Use for steel-faced door and wood frame applications
- Can be trimmed in the field and corner-mitered



## Magnetic Gasketing

### 2815\_M

AVAILABLE FINISHES: **C, D, G**

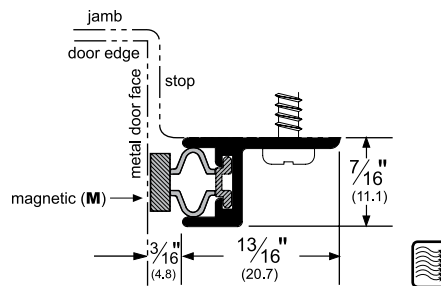


## Adhesive Perimeter Gasketing

For more information on these perimeter gasketing products, please see the Adhesive Gasketing section.

### S773\_

AVAILABLE FINISHES: **BL, D, GR, W**  
AVAILABLE LENGTHS: 17', 18', 20', 21', 25', 30', 250'


- Triple-fin design effectively blocks light and sound from infiltrating a room
- Product designed as hospitality gasketing (see more hospitality products in the Hospitality Products section)



### S88\_

AVAILABLE FINISHES: **BL, C, D, GR, TAN, W**  
AVAILABLE LENGTHS: 17', 18', 20', 21', 25', 30', 204', 510'


- Seal begins compressing at  $\frac{1}{4}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



### S44\_

AVAILABLE FINISHES: **BL, D, GR, W**  
AVAILABLE LENGTHS: 17', 18', 20', 21', 25', 30', 510'

- Designed for tighter frames.
- Demonstrates extremely low closing force.
- Seal begins compressing at  $\frac{5}{16}$ "; compresses to seal up to a  $\frac{1}{16}$ " gap



AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)

**BL** (Black) **C** (Black) **D** (Dark Brown) **W** (White)  
Adhesive Corner Pad Colors: blank (Black Pad) **W** (White Pad)  
Metal: **C** (Clear Anod) **D** (Dark Brown Anod) **G** (Gold Anod)

Copyright © 2012, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.  
Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.